




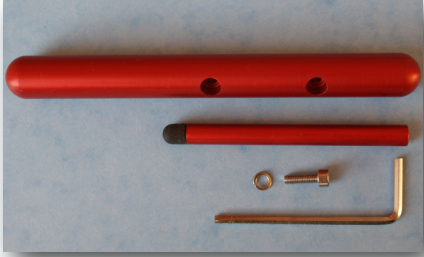

Assembly of the T-Bar Stylus

	<p>Unpack all of the components.</p>
	<p>Identify the top bar.</p> <p>The top bar is the thickest bar and has two recessed holes.</p> <p>One side of the bar has deeper recesses, these will be the recesses used for the screw.</p>
	<p>Insert the thinner bar into the shallow recess on the top bar.</p> <p>Choose either of the two shallow holes (central or offset) to suit the user.</p>
	<p>Fit the Spring washer over the screw</p>
	<p>Insert the screw into the deeper recess.</p> <p>Start the screw by hand to avoid cross threading and damage to the Stylus.</p> <p>Fully tighten the screw with the Allen key provided.</p>

These unassembled parts are not intended to be used by young children.

Replacement tips are available from www.dadinashed.com